
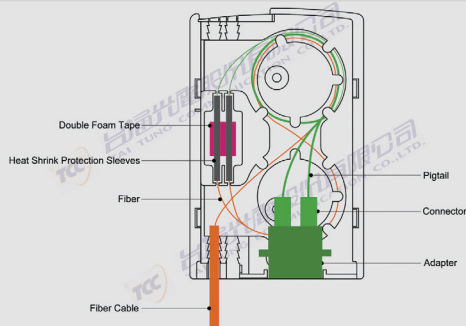


FTB2 壁掛式配線盒 Wall-Mount Fiber Termination Box





- * 屋內壁掛，ABS 塑料材質，堅固又美觀。
- * 適合光纖配線收容管理。
- * 快速滑蓋設計，安裝容易。
- * 可根據需求提供客製化設計。

- * Wall-mounted ABS material to offer a combination of strong and sleek design.
- * Proper loose tube and fiber management to avoid high loss due to bending.
- * Removable sliding cover to allow ease of installation.
- * Customizable according to the requirement.

型號	Model	FTB 2
最大收容芯數	Max. Fiber Storage	2 芯 Fibers
產品描述	Description	光纖與跳線及連接器熔接、收容及管理 Provides storage and protection for loose tube, fibers, splicing, pigtails, adapters and cables.
連接器	Adapter type	SC or as required
應用於	Application	屋內壁掛 Indoor Wall-Mount
尺寸	Size	81(W) x 26(H) x 126(D)mm
重量	Weight	66g

WM-FDP 24 壁掛式配線盒 Wall-Mount Fiber Distribution Panel

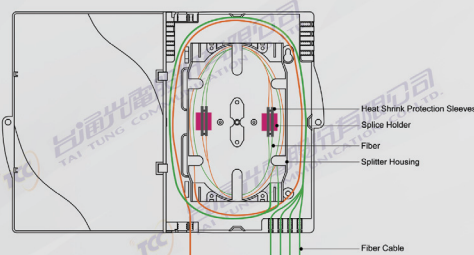

- * 屋內壁掛，ABS 塑料材質，堅固又美觀。
- * 適合光纖配線收容管理。
- * 快拆卸式面板設計，安裝容易。
- * 可根據需求提供客製化設計。

- * Wall-mounted ABS material to offer a combination of strong and sleek design.
- * Proper loose tube and fiber management to avoid high loss due to bending.
- * Removable front door to allow ease of installation.
- * Customizable according to the requirement.

型號	Model	WM-FDP 24
最大收容芯數	Max. Fiber Storage	24 芯 Fibers
產品描述	Description	光纖與跳線及連接器熔接、收容及管理 Provides storage and protection for loose tube, fibers, splicing, pigtails, adapters and cables.
收容盤	Splice Tray	提供一個收容盤，可供最大 24 芯數熔接 1 splice tray contains a maximum of 24 splicing
應用於	Application	屋內壁掛 Indoor Wall-Mount
尺寸	Size	170(W) x 41.5(H) x 230(D) mm
重量	Weight	235.2g